




STEC 47/60 RANGE

PRODUCT CERTIFICATION



DESCRIPTION



High quality cold formed profiles, made of certified galvanized steel sheet.

SCOPE OF APPLICATIONS


- Horizontal component in continuous suspended false ceilings with double structure.

SYSTEMS AND ACCESSORIES



- Continuous suspended ceilings with double structure: F60/27 profile clipped to the Kingspan STEC 47/60 profile, suspended from the structural slab with rods.
- Complementary perimeter profiles for false ceilings: CLIP18 profile (only for F47/18), L-angle range or U-channel range by Kingspan.

BENEFITS

- Quality certified steel sheet rolled by the leading European steel company.
- Clip fixing system to simplify assembly and ensure good fixation between profiles.
- The design of the clips allows them to be used with both the F47/18 and the F60/27 profiles from Kingspan, at 100 mm centres.

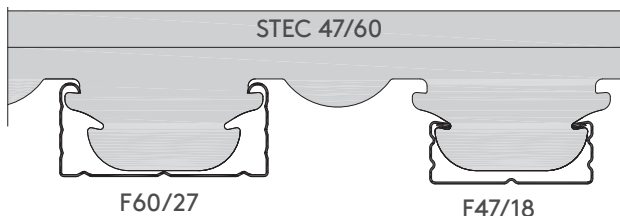

PRODUCT RANGE

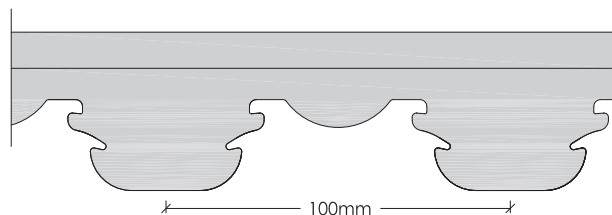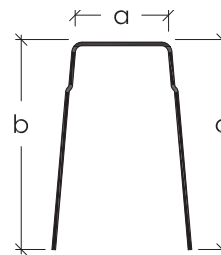

PROFILE	th mm	DIMENSIONS			CERTIFICATES			Units/ pallet
		a	b	c	CE	NF	N	
STEC 47/60	0.7	22	46	46	●		●	360

The STEC 47/60 profile is compatible with F47/18 and F60/27 profiles.

TECHNICAL FEATURES

- Steel grade DX51 D (according to EN 10346 standard).
- Galvanisation type Z140 (140 g/m²).

MANUFACTURING STANDARDS

- AENOR N mark according to the UNE-EN 14195:2005 RP35.12 standard.
- CE mark according to EN 14195:2014 standard.

FIRE REACTION AND ACOUSTICS

- Fire reaction: Euroclass A1 (non combustible).
- Acoustic and fire reaction of Kingspan systems have been accredited by laboratory testing.

STORAGE CONDITIONS

- Store on flat and sheltered surfaces.
- Do not expose to rain or direct sunlight.

Teczone Española S.L.U. reserves the right to modify the contents of this document without any prior warning. Every effort has been made to ensure that the content of this publication is accurate, but Teczone Española S.L.U. and its affiliated companies are not responsible for errors or information that may be misleading. Suggestions regarding the final use or application of the products or work methods are merely informative and Teczone Española S.L.U. and its affiliates do not accept any responsibility in this regard.