




# OUTDOOR RANGE

## DESCRIPTION

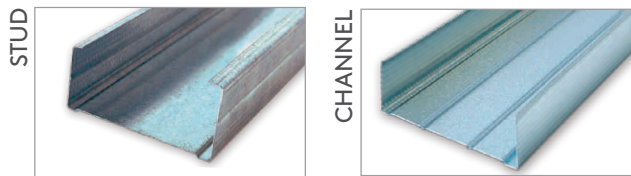

High quality cold formed profiles, made of certified galvanized steel sheet.

## SCOPE OF APPLICATION

- Supporting structures for façade cladding or ventilated façade systems, and for lightweight roofing with cemented boards.

## BENEFITS

- Profiles made of structural steel with guaranteed minimum yield strength.
- Wide and versatile range of studs and channels, with webs up to 150 mm and thicknesses up to 2 mm.
- Structural system compatible with any type of façade and roofing boards.
- Quality certified steel sheet rolled by the leading European steel company.

## TECHNICAL FEATURES

- Steel grade S220GD or higher.
- Galvanised product.
- Different steel grades and/or galvanisation on demand.

## PRODUCT CERTIFICATIONS

- Manufacturing certificate type 2.1.
- Raw material certificate of origin.

## MANUFACTURING STANDARDS


- EN 1090-1:2009+A1:2011.

## FIRE REACTION

- Reaction to fire: Euroclass A1 (non combustible).

Teczone Española S.A.U. reserves the right to modify the contents of this document without any prior warning. Every effort has been made to ensure that the content of this publication is accurate, but Teczone Española S.A.U. and its affiliated companies are not responsible for errors or information that may be misleading. Suggestions regarding the final use or application of the products or work methods are merely informative and Teczone Española S.A.U. and its affiliates do not accept any responsibility in this regard.


## PRODUCT RANGE

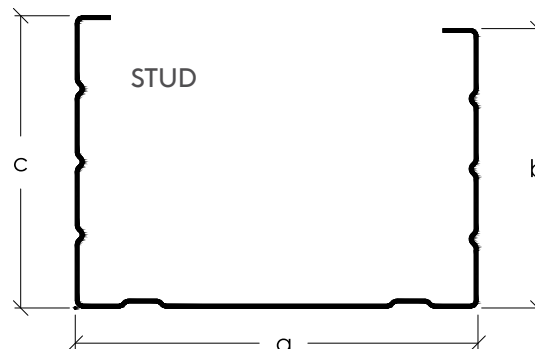

PROFILES	thk (mm)	DIMENSIONS			Units/pallet
		a	b	c	
Stud 50/50	0.7   0.8   1.0	48	48	50	400
Stud 75/50	0.7   0.8   1.0 1.5   2.0	73	48	50	200
Stud 100/50	0.7   0.8   1.0 1.5   2.0	98.5	48	50	280
Stud 125/50	1.0   1.5   2.0	123.5	48	50	160
Stud 150/50	1.0   1.5   2.0	148.5	48	50	140

Studs of a thickness of 1,5 mm or more are manufactured without ribbed finish.

Standard length: 3,000 mm. Other thicknesses and lengths on demand.

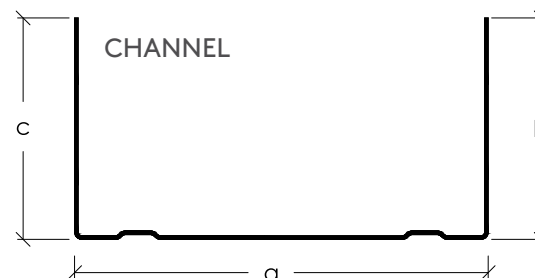

PROFILES	thk (mm)	DIMENSIONS			Units/pallet
		a	b	c	
Channel 50/40	0.7   0.8   1.0	50	40	40	350
Channel 75/40	0.7   0.8   1.0   1.5   2.0	75	40	40	200
Channel 100/40	0.7   0.8   1.0   1.5   2.0	100	40	40	200
Channel 125/40	1.0   1.5   2.0	125	40	40	160
Channel 150/40	1.0   1.5   2.0	150	40	40	128

Standard length: 3,000 mm. Other thicknesses and lengths on demand.

## STORAGE CONDITIONS

- Store on flat and sheltered surfaces.
- Do not expose to rain or direct sunlight.