


# MODULPAN ROC

MINERAL WOOL INSULATING PANEL  
FOR SECTORISATION



- Modulpán Roc LL HD offers the ideal solution for fire compartmentation applications in the building sector, industrial installations, food industry and refrigeration installations.
- Suitable for ceilings and internal partitions.
- Highly customisable panel (two possible core types, various sheet thicknesses, various profiling options, etc.).
- Rigid mineral wool insulation core with high thermal performance (thermal transmittance of  $0.40 \text{ W/m}^2\text{K}$  for the 100 mm thick LL LD core panel).

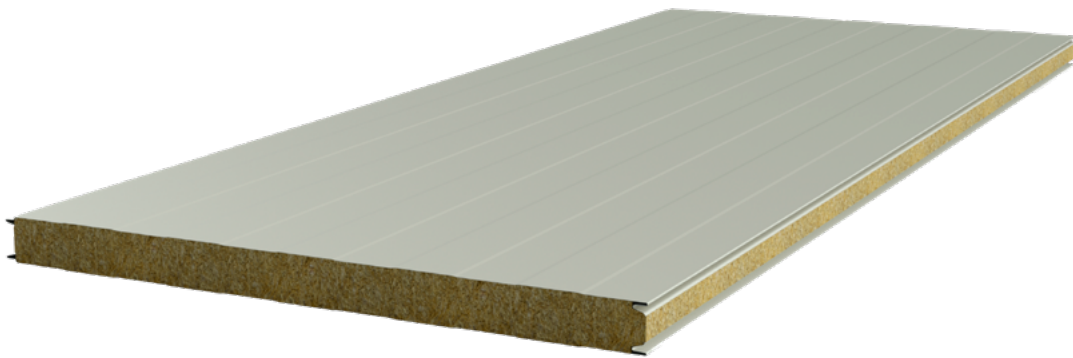

**TECZONE**


# MODULPAN ROC Mineral wool panel

## DESCRIPTION AND APPLICATIONS

- Insulating sandwich panel for walls and ceilings with mineral wool core and pre-painted steel faces.
- Highly customisable panel, with three types of core (LL LD, LL HD or LL HD STD), sheet thicknesses between 0.5 and 0.8 mm, various profiling options, etc.
- Within the range of panels, the Modulpan Roc model is designed for fire compartmentation applications where high fire resistance is required. The fire resistance are available up to up to 120 minutes (EI 120) without additional sealing at the joint for LL HD core panels with a thickness of 100mm. Please refer to this document for all possible classifications by thickness type.



## TECHNICAL FEATURES

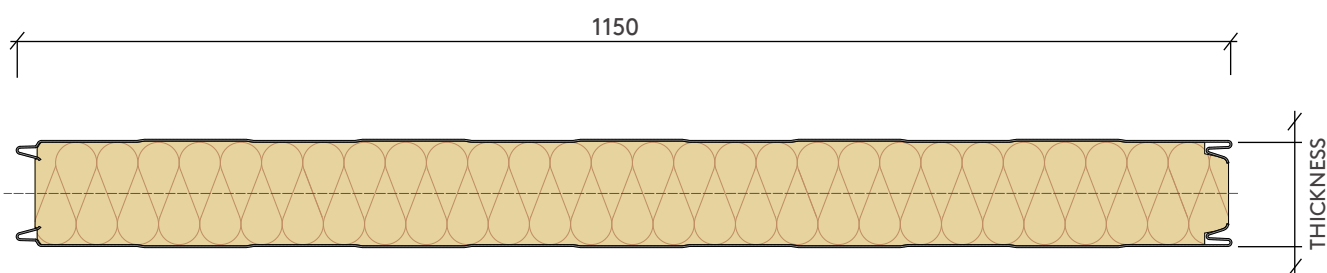

Useful width		1,150 mm			
Insulating core		Mineral Wool			
Core density		LL LD: 90 kg/m <sup>3</sup>   LL HD: 120 kg/m <sup>3</sup>   LL HD STD: 120 kg/m <sup>3</sup>			
Manufacturing length		from 1.8 to 12.5 m			
Panel thickness <sup>(2)</sup>		60	80	100	(mm)
Self-weight <sup>(1)</sup>	LL LD Core	13.95	15.75	17.55	(kg/m <sup>2</sup> )
	LL HD / LL HD STD Core	15.70	18.10	20.50	
Thermal transmittance <sup>(1)</sup>	LL LD Core	0.66	0.50	0.40	(W/m <sup>2</sup> K)
	LL HD / LL HD STD Core	0.72	0.54	0.43	(W/m <sup>2</sup> K)

(1) Considering sheets of thickness 0.5 mm.

(2) Other thicknesses available on request.

# Mineral wool panel **MODULPAN ROC**

## CERTIFICATIONS AND APPLICABLE REGULATIONS

### Reaction to fire classification

The Modulpan Roc LL (LD, HD and HD STD) range has the reaction to fire classification A2 - s1, d0 according to EN 13501-1:2018 (Euroclasses).

### Fire resistance

The Modulpan Roc LL HD panel offers very good fire performance with a fire resistance up to 120 minutes of insulation and integrity without the need for additional sealing at the joint.

	Core	Panel thicknesses		
		60	80	100
Modulpan Roc	LL LD	-	-	-
	LL HD	EI 30 <sup>(1)</sup>	EI 60 <sup>(1)</sup>	EI 120 <sup>(1)</sup>
	LL HD STD			

(1) Tested according to EN 1264-1:2015, classified according to EN 13501-2:2023. Direct field of application of the test results of the test results of the Modulpan Roc LL HD panel with vertical joint with 0.6 mm steel sheets. See installation conditions and EXAP.

### Implementing legislation

Hot galvanised sheet metal according to EN 10346 and organic coatings according to EN 10169.

### Product certification




CE marked according to EN 14509:2013.

## COMPONENTS

### Tongue and groove joint

Double tongue and groove joint with high depth and easy assembly. For fire-resistant solutions, the joint includes an intumescent strip.

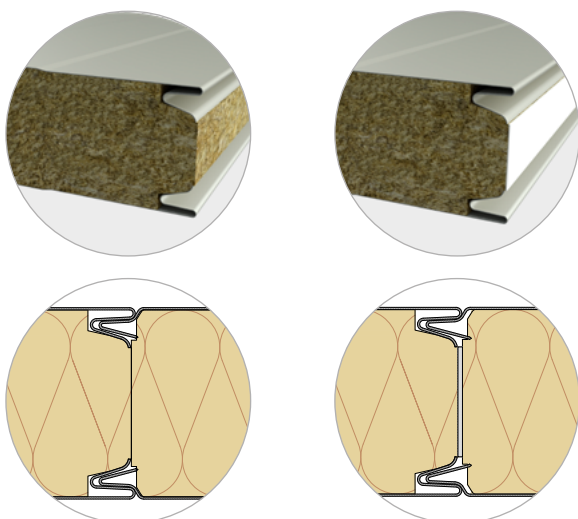

Modulpan Roc LL LD  
Modulpan Roc LL HD STD

Modulpan Roc LL HD  
(Intumescent strip included)

### Insulating core

Mineral wool of density 90 kg/m<sup>3</sup> (LL LD) or 120 kg/m<sup>3</sup> (LL HD) or 120 kg/m<sup>3</sup> (LL HD STD).


### Steel faces

Cold-formed sheet from pre-painted, galvanised or stainless steel coil, standard sheet thicknesses between 0.5 mm and 0.8 mm, for external or internal surfaces.

# MODULPAN ROC Mineral wool panel

## FINISHES

### Profiling options

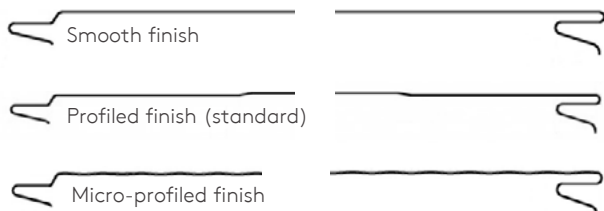

### Available coatings

The outer steel faces of the panel are available in various colours and highly durable coatings: PET, PVC, PVDF, HDX.



Download the latest version by scanning the QR code or by clicking [here](#)

Teczone Española S.A.U. reserves the right to modify the contents of this document without any prior warning. Every effort has been made to ensure that the content of this publication is accurate, but Teczone Española S.A.U. and its affiliated companies are not responsible for errors or information that may be misleading. Suggestions regarding the final use or application of the products or work methods are merely informative and Teczone Española S.A.U. and its affiliates do not accept any responsibility in this regard.