

CONVENTIONAL & DIE-STAMPED FLASHINGS



DESCRIPTION AND APPLICATIONS

Product

High quality, cold-shaped, steel sheet flashings. Option for manufacture in various thicknesses, coverings and colours, thus obtaining full integration into the enclosure.


Applications

Facade and roof finishes for industrial, residential, commercial and sports facilities buildings.

PRODUCT RANGE

Conventional flashings


Lengths of up to 8,000 mm, with option of manufacturing-to-order in accordance with the requirements of each project.

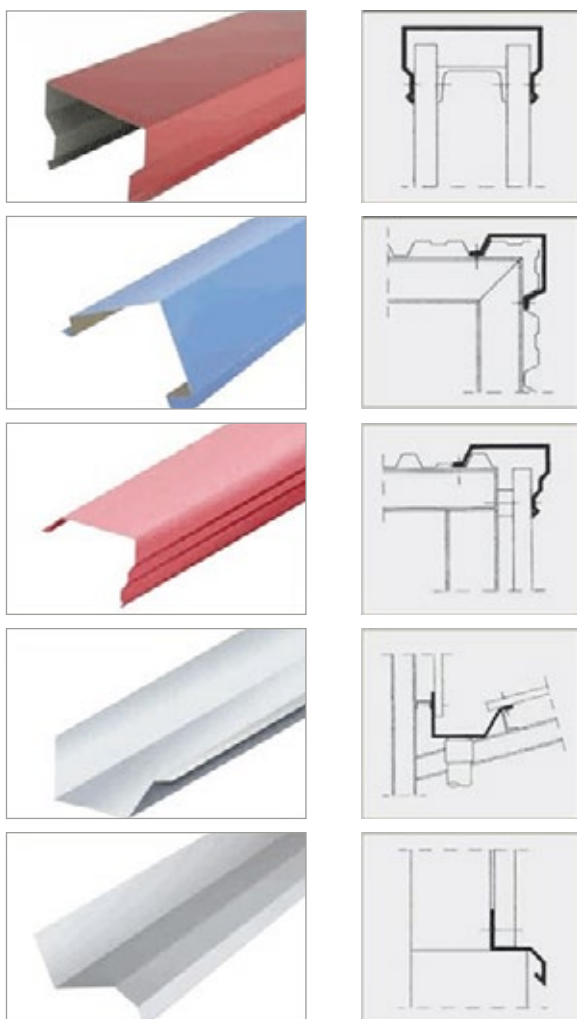

Die-stamped finishes

The die-stamped flashings include perforations according to the TZ profile for enclosures to which they are coupled. The die-stamped finishes can be produced for the profiles indicated below and their lengths may vary depending on type:

- TZ-C ROOF panels / Length 3,650 mm (useful 3,450 mm)
- TZ-XT ROOF panels / Length 3,200 mm (useful 3,000 mm)
- TZ-30 ROOF or FACADE Profiles / Length 3,500 mm (useful 3,300 mm)
- TZ-32 ROOF Profile / Length 3,350 mm (useful 3,150 mm)
- TZ-40 ROOF Profile / Length 3,200 mm (useful 3,000 mm)

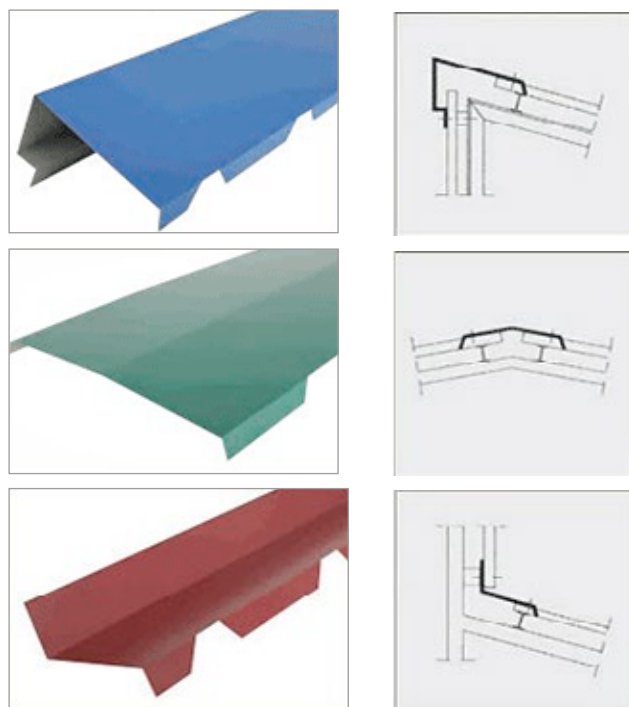

APPLICABLE STANDARDS

UNE-EN 10346 standard for galvanised coatings.

UNE-EN 10169 standard for organic coatings.

Teczone Española S.A.U. reserves the right to modify the contents of this document without any prior warning. Every effort has been made to ensure that the content of this publication is accurate, but Teczone Española S.A.U. and its affiliated companies are not responsible for errors or information that may be misleading. Suggestions regarding the final use or application of the products or work methods are merely informative and Teczone Española S.A.U. and its affiliates do not accept any responsibility in this regard.